


Horizontal Structural Saws

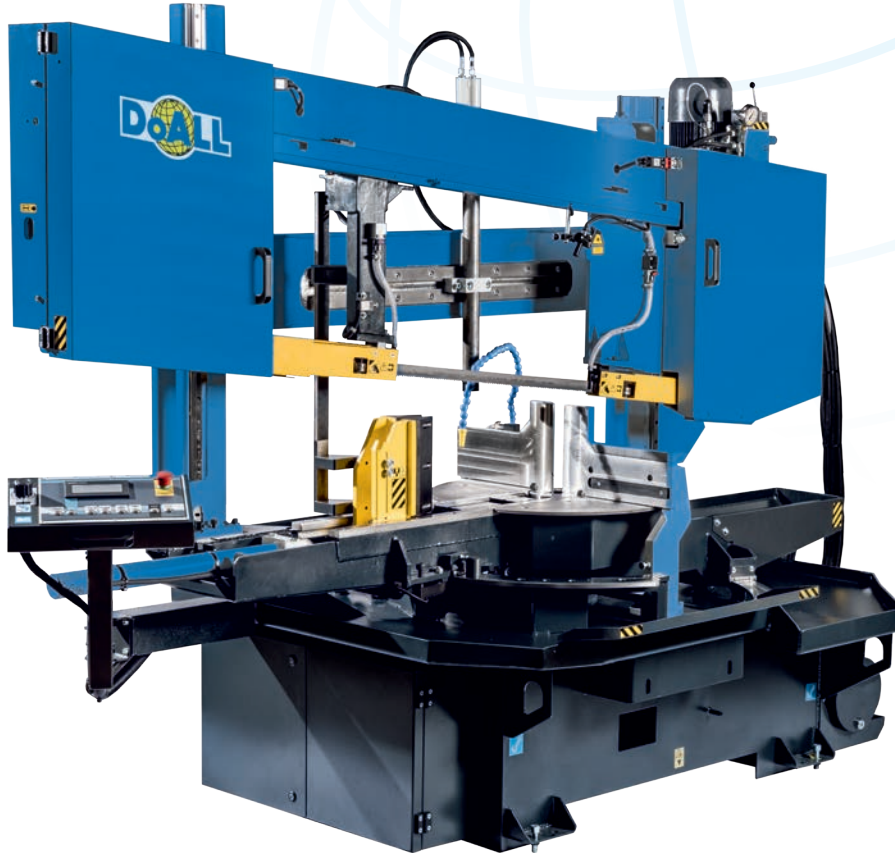

DCDS-600SA
Horizontal Structural Saw –
17.25 x 24" Rectangular Capacity
and 18" Round Capacity

STRUCTURALL®

DoALL StructurALL® series metal cutting band saws are among the best multi-purpose horizontal band saws in the industry. Specially engineered for high performance in fabricating environments, these horizontal swivel or scissor style saws are built for speed, accuracy and increased profits for your business.

DoALL offers a full range of StructurALL metal cutting band saws with round capacities up to 21". A large variety of optional accessories are available to customize these machines for specific sawing requirements. DoALL StructurALL metalworking saws are an economical, option to meet your needs without straining your budget!




Solutions for ALL Your Sawing Needs

DoALL dual column, dual swivel are ideal for production sawing of a large variety of materials including, but not limited to, structural solids, stainless and tool steel. Double column, double miter saws are ideal machines for a fabricator cutting multiple angles in the same work piece.


DoALL Model Number	DCDS-600SA	DCDS-600NC	DCDS-750SA	DCDS-750NC
Warranty	Parts/Service	Parts/Service	Parts/Service	Parts/Service
Warranty Length	2-year standard	2-year standard	2-year standard	2-year standard
Capacity Rectangle at 90° HxW	17.25 x 24" (440x610mm)	17.25 x 24" (440x610mm)	19 x 30" (480x750mm)	19 x 30" (480x750mm)
Capacity Round at 90°	18.5" (470mm)	18.5" (470mm)	20" (500mm)	20" (500mm)
Round Solid Capacity at 90°	9-7/8" (250mm)	9-7/8" (250mm)	15-3/4" (400mm)	15-3/4" (400mm)
Rectangle Capacity at 45°	19.5 x 16.3" (495x415mm)	19.5 x 16.3" (495x415mm)	19.7 x 18.9" (500x480mm)	19.7 x 18.9" (500x480mm)
Round Capacity at 45°	18.5" (470mm)	18.5" (470mm)	19.7" (500mm)	19.7" (500mm)
Rectangle Capacity at 60°	12 x 16.7" (305x425mm)	12 x 16.7" (305x425mm)	13 x 18.9" (330x480mm)	13 x 18.9" (330x480mm)
Round Capacity at 60°	13" (330mm)	13" (330mm)	13" (330mm)	13" (330mm)
Blade Drive Motor	5 hp (4kW)	5 hp (4kW)	5 hp (4kW)	5 hp (4kW)
Blade Speeds	65-328 fpm (20-100mpm)	65-328 fpm (20-100mpm)	65-328 fpm (20-100mpm)	65-328 fpm (20-100mpm)
Maximum Blade Length	238-1/2" (6060mm)	238-1/2" (6060mm)	256" (6500mm)	256" (6500mm)
Blade Widths & Gage	1-1/4 x 0.042" (34x1.1mm)	1-1/4 x 0.042" (34x1.1mm)	1-1/2" x 0.05" (41x1.3mm)	1-1/2" x 0.05" (41x1.3mm)
HMI Controller	Yes	Yes	Yes	Yes
Standard Indexer	N/A	6.56 ft (2m)	N/A	6.56 ft (2m)
More information at	doallsaws.com/dcds-600sa	doallsaws.com/dcds-600nc	doallsaws.com/dcds-750sa	doallsaws.com/dcds-750nc
Material Pass Line Height	31-1/2" (800mm)	31-1/2" (800mm)	32" (815mm)	32" (815mm)
Floor Space Required	138 x 69 x 87" (3500x1760x2200mm)	126 x 192 x 94" (3200x4880x2390mm)	142 x 67 x 95" (3600x1700x2400mm)	142 x 232 x 95" (3600x5880x2400mm)
Weight	3715 lbs (1685kg)	8455 lbs (3835kg)	4409 lbs (2000kg)	9149 lbs (4150kg)
Miter Cutting	60 degrees Left and Right	60 degrees Left and Right	60 degrees Left and Right	60 degrees Left and Right
Blade Guides	Carbide Faced	Carbide Faced	Carbide Faced	Carbide Faced
Index System	Hydraulic Control	Electromotor and gearbox	Hydraulic Control	Electromotor and gearbox
Hydraulic Pump	3.8 hp (2.84kW)	3.8 hp (2.84kW)	3 hp (2.2kW)	3 hp (2.2kW)
Hydraulic Tank Capacity	N/A	N/A	3.4 gal (13.0 L)	3.4 gal (13.0 L)
Coolant Pump	0.16 hp (0.12kW)	0.16 hp (0.12kW)	0.16 hp (0.12kW)	0.16 hp (0.12kW)
Coolant Tank Capacity	6-5/8 gal (25 lit)	6-5/8 gal (25 lit)	10-1/2 gal (40 lit)	10-1/2 gal (40 lit)
Auto Index Single Stroke Min-Max	N/A	0.12-78.7" (3-2000mm)	N/A	0.12-78.7" (3-2000mm)
Auto Index Multiple Stroke Min-Max	N/A	394" (9999mm)	N/A	394" (9999mm)
Max Bundle Capacity at 90°	24" x 10" (610x255mm)	24" x 10" (610x255mm)	29.5" x 10.2" (750x260mm)	29.5" x 10.2" (750x260mm)
Min Bundle Capacity at 90°	0.4" (10mm)	0.4" (10mm)	0.4" (10mm)	3.3" (85mm)
Minimum Butt End	1.2" (30mm)	5.5" (140mm)	1.2" (30mm)	4.7" (120mm)
Vise	Hydraulic	Hydraulic	Hydraulic	Hydraulic

Features and Benefits:

- True dual column design with high rigidity for outstanding cutting performance and life
- Dual miter capability up to 60 degrees right and left
- Standard work area lighting
- Optional right and left modular work conveyors
- Optional power work conveyors
- Optional lift conveyors
- Optional right and left work roll table to ease movement of material

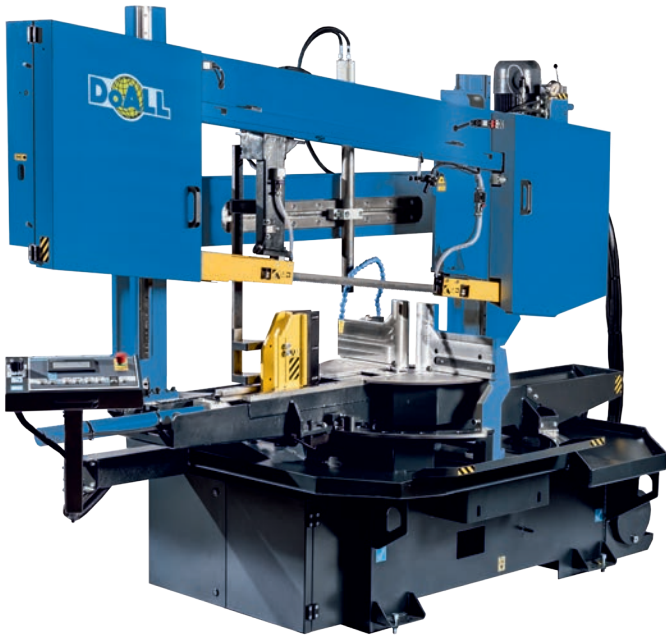

DCDS-600SA

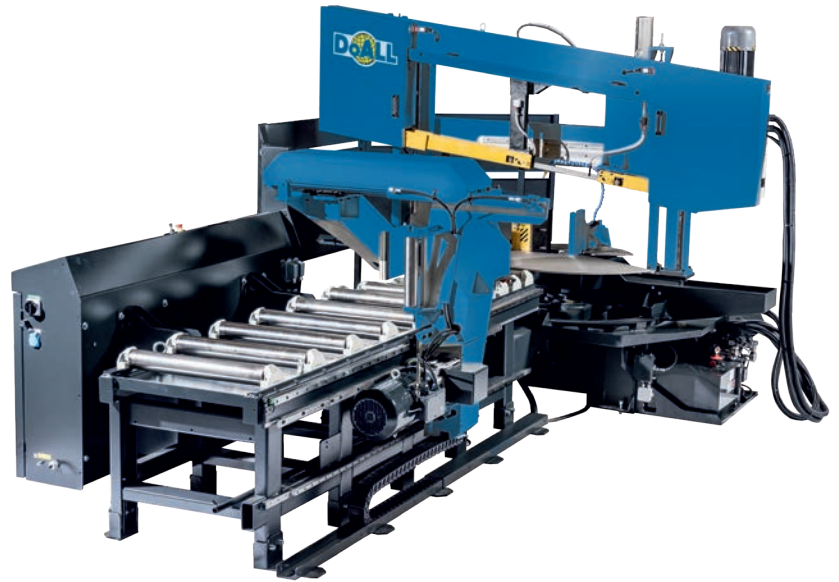

DCDS-600NC



DCDS-750SA




DCDS-750NC

DoALL offers a variety of low cost, general purpose production metal-cutting band saws. These saws are ideal for small shops and maintenance facilities that have an occasional need to cut structural material. A large variety of optional accessories are available to customize the machine for specific sawing requirements.

DoALL Model Number	DS-320M	DS-320SA	S-320CNC	DS-400CNC	DS-500SA	DS-600SA - Coming Soon
Warranty	Parts/Service	Parts/Service	Parts/Service	Parts/Service	Parts/Service	Parts/Service
Warranty Length	1 year standard	1 year standard	1 year standard	1 year standard	1 year standard	1 year standard
Capacity Rectangle at 90° WxH	11.75 x 12.5" (300 x 320mm)	11.75 x 12.5" (300 x 320mm)	11.75 x 12.5" (300 x 320mm)	14 x 16" (350 x 400mm)	14 x 20" (360 x 500mm)	18 x 23.5" (460 x 600mm)
Capacity Round at 90°	11.75" (300mm)	11.75" (300mm)	11.75" (300mm)	13.75" (350mm)	15" (380mm)	18" (460mm)
Round Solid Capacity at 90°	7" (180mm)	7" (180mm)	7" (180mm)	9-7/8" (250mm)	9-7/8" (250mm)	15-3/4" (400mm)
Rectangle Capacity at 45°	11.75 x 9.75" (300 x 250mm)	11.75 x 9.75" (300 x 250mm)	11.75 x 9.75" (300 x 250mm)	13.75 x 10" (350 x 250mm)	15.75 x 7.5" (400 x 190mm)	18.5 x 9.8" (470 x 250mm)
Round Capacity at 45°	11.75" (300mm)	11.75" (300mm)	11.75" (300mm)	7.1" (180mm)	14.2" (360mm)	18" (460mm)
Rectangle Capacity at 60°	7.75 x 7.75" (200 x 200mm)	7.75 x 7.75" (200 x 200mm)	7.75 x 7.75" (200 x 200mm)	13.75 x 6.5" (350 x 165mm)	10.6 x 12.6" (270 x 320mm)	12.6 x 9.5" (320 x 240mm)
Round Capacity at 60°	7.75" (200mm)	7.75" (200mm)	7.75" (200mm)	N/A	12.2" (310mm)	12.5" (320mm)
Blade Drive Motor	2 - 2.7 hp (1.4-2 kW)	3 hp (2.23kW)	3 hp (2.23kW)	4 hp (3kW)	4 hp (3kW)	5 hp (4kW)
Blade Speeds	10-240 fpm (35-70 mpm)	65-328 fpm (20-100 mpm)	65-328 fpm (20-100 mpm)	65-328 fpm (20-100 mpm)	65-328 fpm (20-100 mpm)	65-328 fpm (20-100 mpm)
Maximum Blade Diameter	144" (3660mm)	144" (3660mm)	144" (3660mm)	178" (4520mm)	188" (4780mm)	212" (5380mm)
Blade Widths & Gage	1 x 0.035" (27 x 0.9mm)	1 x 0.035" (27 x 0.9mm)	1 x 0.035" (27 x 0.9mm)	1-1/4 x 0.042" (34 x 1.1mm)	1-1/4 x 0.042" (34 x 1.1mm)	1-1/2" x 0.05" (41 x 1.3mm)
HMI Controller	Standard control panel	Mitsubishi	Mitsubishi	Saw Micro	Mitsubishi	Mitsubishi
Compatible Voltage	230v, 3-Phase, 60Hz Wye configuration required	230v, 3-Phase, 60Hz Wye configuration required	230v, 3-Phase, 60Hz Wye configuration required	460v, 3-Phase, 60Hz Wye configuration required	460v, 3-Phase, 60Hz Wye configuration required	460v, 3-Phase, 60Hz Wye configuration required
More Information Found at	doallsaws.com/ds-320m	doallsaws.com/ds-320sa	doallsaws.com/s-320cnc	doallsaws.com/ds-400cnc	doallsaws.com/ds-500sa	doallsaws.com/ds-600sa
Material Pass Line Height	31-1/2" (800mm)	31-1/2" (800mm)	31-1/2" (800mm)	37" (940mm)	32-1/3" (820mm)	31-1/2" (800mm)
Floor Space Required	90 x 46 x 81" (2270 x 1170 x 2040mm)	90 x 46 x 81" (2270 x 1170 x 2040mm)	91 x 90 x 81" (2309 x 2278 x 2041mm)	91 x 108 x 99" (2300 x 2750 x 2500mm)	109 x 38 x 90" (2750 x 950 x 2270mm)	136 x 45 x 107" (3457 x 1140 x 2700mm)
Weight	1209 lbs (548kg)	1290 lbs (585kg)	3000 lbs (1361kg)	2921 lbs (1325kg)	1576 lbs (715kg)	2646 lbs (1200kg)
Miter Cutting	60 degrees Right and 45 degrees Left	60 degrees Right and 45 degrees Left	0-60 degrees Right	45 degrees Left and Right in Semi-auto mode only	60 degrees Left and Right	60 degrees Left and Right
Blade Guides	Bimetal or Carbide	Bimetal or Carbide	Bimetal or Carbide	Hard metal	Cast iron	Cast iron
Feed System	Manual/Gravitational	Semi-Automatic Hydraulic	Hydraulic Control	Hydraulic Control	Semi-Automatic Hydraulic	Semi-Automatic Hydraulic
Coolant Pump	0.07 hp (0.05kW)	0.6 hp (0.44kW)	0.6 hp (0.44kW)	0.07 hp (0.05kW)	0.6 hp (0.44kW)	0.07 hp (0.05kW)
Coolant Tank Capacity	5-1/4 gal (20 lit)	5-1/4 gal (20 lit)	5-1/4 gal (20 lit)	5-1/4 gal (20 lit)	5-1/4 gal (20 lit)	5-1/4 gal (20 lit)
Auto Index Single Stroke Min-Max	N/A	N/A	0.12-19.7" (3-500mm)	0.12-19.3" (3-490mm)	N/A	N/A
Auto Index Multiple Stroke Min-Max	N/A	N/A	394" (9999mm)	126" (3200mm)	N/A	N/A
Maximum Nesting Capacity at 90° (wxh)	12.5 x 6.25" (320x160mm)	12.5 x 6.25" (320x160mm)	9 x 4.75" (230x120mm)	15.7" x 8.3" (400x210mm)	19.7" x 8.7" (500x220mm)	23.6 x 9.8" (600x250mm)
Minimum Nesting Capacity at 90° (wxh)	0.12" (3mm)	0.12" (3mm)	7.9" x 0.4" (200x10mm)	0.20" (5mm)	0.20" (5mm)	0.20" (5mm)
Minimum Butt End	1.2" (30mm)	1.2" (30mm)	0.8" (20mm)	11" (280mm)	N/A	N/A

Features and Benefits:

- Wide range of blade speeds
- Over feed protection
- High level of dampening with use of many key cast components
- Lift points of the machine are clearly indicated for ease of movement and installation
- Optional right or left miter modular designed work conveyors in 40" and 80" lengths
- Optional power roller conveyor makes moving heavy material easy

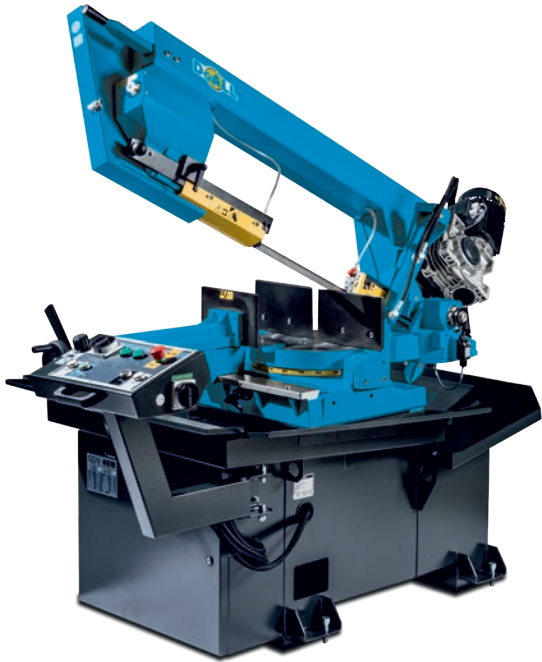

DS-320M



DS-320SA



DS-400CNC



DS-500SA


DoALL miter and non-miter saws increase flexibility and improve efficiency in fabrication shops or other sawing applications that require the efficient cutting of structural material. DoALL offers a full range of saws that feature a variety of cutting capacities with both straight and angle cutting options.



400M



400S

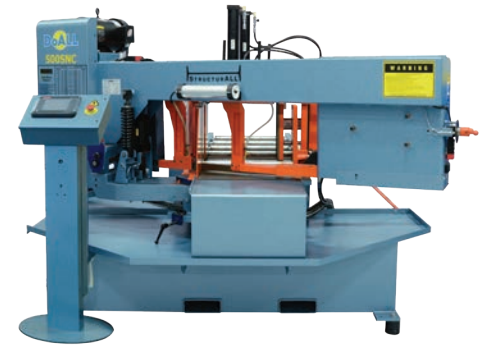

500SNC

DoALL Model Number	400-M	400-S	500-SNC
Warranty	Parts Only	Parts Only	P parts/Service
Warranty Length	Send new parts	Send new parts	1 year standard
Capacity Rectangle at 90° HxW	10 x 16" (254x406mm)	10 x 16" (254 x 406mm)	14 x 20" (355 x 510mm)
Capacity Round at 90°	10-3/4" (273mm)	10-3/4" (273mm)	14-3/4" (375mm)
Rectangle Capacity at 45°	N/A	9 x 10-3/4" (229 x 273mm)	14 x 13" (356 x 330mm)
Round Capacity at 45°	N/A	10-3/4" (273mm)	13" (330mm)
Rectangle Capacity at 60°	N/A	N/A	14 x 8" (356 x 203mm)
Round Capacity at 60°	N/A	N/A	10" (254mm)
Blade Drive Motor	2 hp (1.5kW)	2 hp (1.5kW)	5 hp (3.75 kW)
Blade Speeds	105-275 fpm (32-82mpm)	105-275 fpm (32-82mpm)	50-400 fpm (15-120mpm)
Maximum Blade Length	158" (4013 mm)	158" (4013 mm)	197" (5003mm)
Blade Widths & Gage	1 x 0.035" (25.4x0.89mm)	1 x 0.035" (25.4x0.89mm)	1-1/4 x.042" (32 x 1.1mm)
DoALL Standard Saw Blade	333258158	333258158	303902197
More information at	doallsaws.com/400m	doallsaws.com/400s	doallsaws.com/500snc
Work Height	29-1/2" (750mm)	29-1/2" (750mm)	29" (737mm)
Material Pass Line Height	26-1/8" (664mm)	29-1/8" (740mm)	29" (737mm)
Floor Space Required	87 x 37 x 55" (2210 x 940 x 1397mm)	87 x 42 x 55" (2210 x 1067 x 1397mm)	96 x 102 x 90" (2348 x 2591 x 2286mm)
Weight	1100 lbs (499kg) - spec states 1065lbs	1200 lbs (544kg) - spec says 1150 lbs	3000 lbs (1361kg)
Blade Guides	Carbide faced	Carbide faced	Carbide faced
Feed System	Hydraulic Control, Infinitely variable, Spring balanced head	Hydraulic Control, Infinitely variable, Spring balanced head	Force/Rate
Hydraulic Pump	N/A	N/A	2 hp (1.5kW)
Hydraulic Tank Capacity	N/A	N/A	12 gal (45 L)
Cooling System	Flood standard, Mist optional	Flood standard, Mist optional	Flood standard, Mist optional
Coolant Tank Capacity	6 gal (22 lit)	6 gal (22 lit)	N/A
Auto Index Single Stroke Min-Max	N/A	N/A	14-40" (356-1016mm)
Minimum Butt End	N/A	N/A	14" (356mm)
Vise	Manual	Manual	Hydraulic full height and stroke
Table Capacity	1800 lbs (816kg)	1800 lbs (816kg)	1800 lbs (816kg)

Features and Benefits:

- Extremely accurate
- Large variety of options available for custom applications
- Budget friendly list pricing
- Wide band for faster cutting speeds
- Fast, accurate cut positioning
- Simple design for easy saw operation



Laser




Band door interlocks




Gear driven band brush



Work light

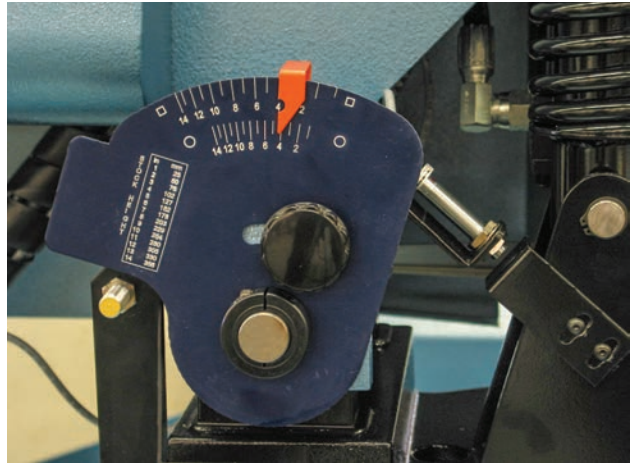


Work height sensor

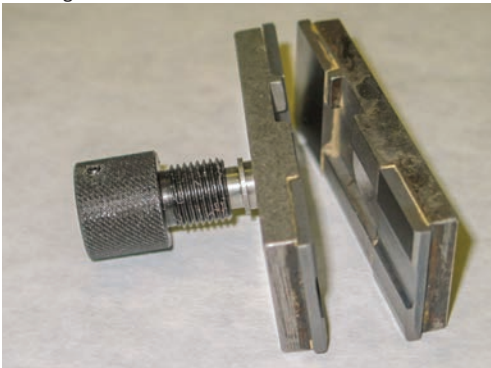

Insert assembly



Full stroke vises

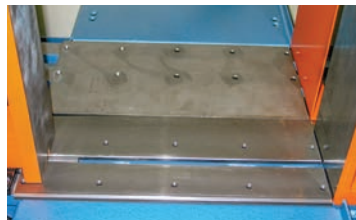

Wear plates

Standard Equipment on most models:

- HMI saw control
- Digital read out of cutting angle
- Work light
- Hydraulic band tension
- Feed rate indicator
- Automatic feed control
- Automatic guide arm setting
- Band brush
- Safety covers
- Flood coolant
- Tool kit
- Complimentary DoALL cutting fluids package
- One DoALL bi-metal saw blade
- Digital copy of operation and parts manuals

Optional Accessories on most models:

- Chain chip conveyor with pan
- Front and rear vise nesting
- Mist-style saw band lubrication
- Laser line generator
- Cut piece collection box with drain
- Large chip pan with drain
- Handle for chip pan or collection box
- Input or output roller conveyors
- Heavy-duty input or output roller conveyors
- Input and output powered conveyor for angle cuts
- Indexing extension
- Hydraulic lift input or output roller conveyor
- Fixed or movable side vertical guide roller
- Vertical hold down
- Additional conveyor rollers
- Wear parts service kit



Sample control panel



Work light



Chip blower



Vise Nesting

Visit www.DoALLsaws.com for most accurate information on standard equipment and accessories



SAWING PRODUCTS

5505 West 123rd Street
Savage, MN 55378 USA
www.DoALLsaws.com
1-888-362-5572

DSP-STRUCT-103017

Copyright © 2017 DoAll Sawing Products. All Rights Reserved. No image(s) or part(s) from this site may be reproduced without the written permission of Continental Machines, Inc. Options, specifications, prices and site content is subject to change without notice or obligation. Machine safety items may be omitted for illustration purposes only -- For proper application, always read the operation manual.